Pin

1690


Design By Ichiro Iwasaki

Wall lamp. Design by Ichiro Iwasaki. Wall light which provides passageways with ambient illumination via indirect light. Available in white, black, cream and green matt finishes.

Model Sheet







Min. quantity, upcharge and extra lead time apply

Finish

23 Warm White
test ral

62 Green
NCS S 3010-G20Y

11 Black
NCS S 8500-N

LED 2700 K

Control On/Off

Electrical connection Surface Canopy

Light source 1 x LED 4,48W 350mA

E

LED CRI>90 452.95 lm 100.66
2700 K

Driver Constant Current 350 mA 100~240 V
50~60 Hz

F LED IP20 Bi-volt 50-60Hz


Application Wall

Packaging
1 Box
0.473 m x 0.355 m x 0.146 m
Gross weigth 1.6 kg
Net weigth 0.8 kg
Vol. 0.0245 m3


Lighting effect


360° Surface Grazer

Full-circle grazing light.



Photometric Data

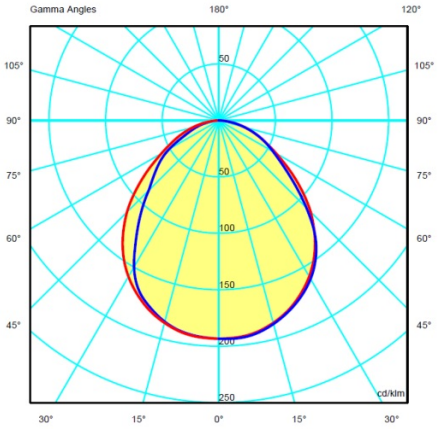

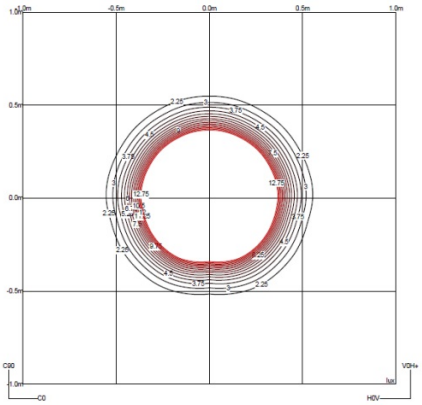

Efficiency	31.88 lm/W
Coordinate System	CG
Total Flux	192.18 lm
Maximum Value	80.54 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Pin

1686


Design By Ichiro Iwasaki

Wall lamp. Design by Ichiro Iwasaki. Wall light which provides passageways with ambient illumination via indirect light. Available in white, black, cream and green matt finishes.

Model Sheet





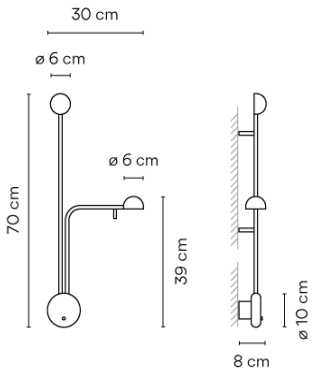


Min. quantity, upcharge and extra lead time apply

Finish	23 Warm White test ral
	62 Green NCS S 3010-G20Y
	11 Black NCS S 8500-N
LED	2700 K
Control	On/Off
Electrical connection	Surface Canopy
Light source	2 x LED 4,48W 350mA E
LED	CRI>90 905.9 lm 100.66 2700 K
Driver	Constant Current 350 mA 100~240 V 50~60 Hz F LED IP20 Bi-volt 50-60Hz
Application	Wall
Packaging	1 Box 0.792 m x 0.445 m x 0.177 m Gross weigth 2.64 kg Net weigth 1.2 kg Vol. 0.0623 m3


Lighting effect


Reading

High intensity, glare-free task lighting



Photometric Data

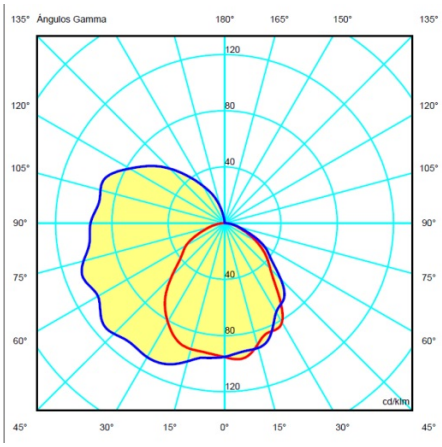

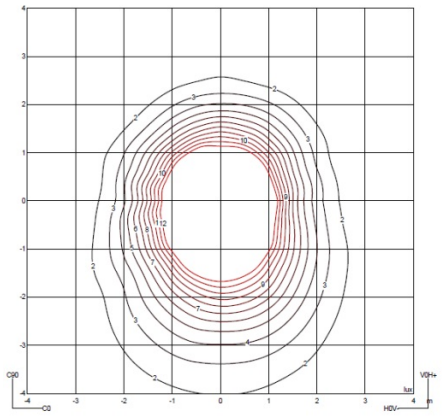

Efficiency	46.09%
Coordinate System	CG
Total Flux	900.00
Maximum Value	112.33

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Pin

1685


Design By Ichiro Iwasaki

Wall lamp. Design by Ichiro Iwasaki. Wall light which provides passageways with ambient illumination via indirect light. Available in white, black, cream and green matt finishes.

Model Sheet





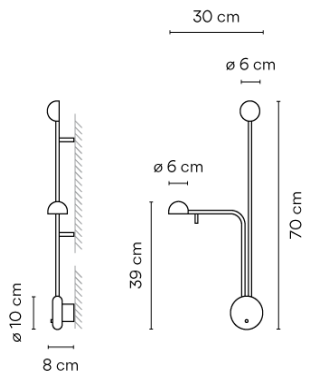


Min. quantity, upcharge and extra lead time apply

Finish	58 Cream NCS S 2005-Y20R
	11 Black NCS S 8500-N
	23 Warm White test ral
LED	2700 K
Control	On/Off
Electrical connection	Surface Canopy
Light source	2 x LED 4,48W 350mA E
LED	CRI>90 905.9 lm 100.66 2700 K
Driver	Constant Current 350 mA 100~240 V 50~60 Hz F LED IP20 Bi-volt 50-60Hz
Application	Wall
Packaging	1 Box 0.792 m x 0.445 m x 0.177 m Gross weigth 2.64 kg Net weigth 1.2 kg Vol. 0.0623 m3


Lighting effect


Reading

High intensity, glare-free task lighting



Photometric Data

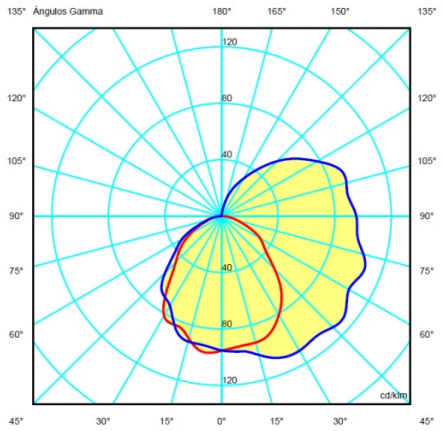

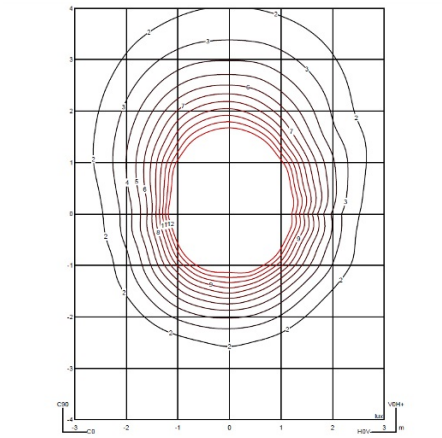

Efficiency	46.09%
Coordinate System	CG
Total Flux	900.00
Maximum Value	112.33

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Pin

1680


Design By Ichiro Iwasaki

Wall lamp. Design by Ichiro Iwasaki. Wall light for reading, ideal for bedrooms. The diffuser can turn and rotate to bring the light to where it is needed. Available in white, black, cream and green matt finishes.

Model Sheet





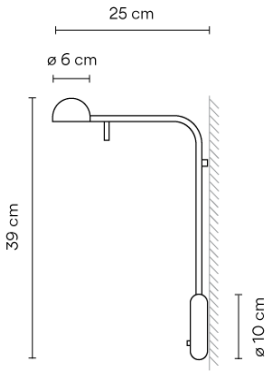

Min. quantity, upcharge and extra lead time apply

Finish

58 Cream
NCS S 2005-Y20R

23 Warm White
test ral

11 Black
NCS S 8500-N

LED 2700 K

Control On/Off

Electrical connection Surface Canopy

Light source 1 x LED 4,48W 350mA

E

LED CRI>90 452.95 lm 100.66 2700 K

Driver Constant Current 350 mA 100~240 V 50~60 Hz

F LED IP20 Bi-volt 50-60Hz


Application Wall

Packaging
1 Box
0.473 m x 0.355 m x 0.146 m
Gross weigth 1.5 kg
Net weigth 1 kg
Vol. 0.0245 m3


Lighting effect


Reading

High intensity, glare-free task lighting



Photometric Data

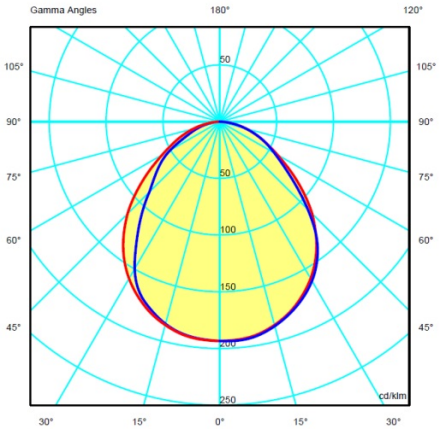

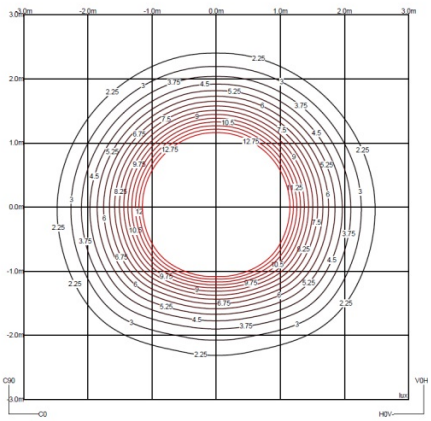

Efficiency	31.88 lm/W
Coordinate System	CG
Total Flux	192.18 lm
Maximum Value	80.54 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Pin

1675


Design By Ichiro Iwasaki

Wall lamp. Design by Ichiro Iwasaki. Wall light for reading, ideal for bedrooms. The diffuser can turn and rotate to bring the light to where it is needed. Available in white, black, cream and green matt finishes.

Model Sheet








Min. quantity, upcharge and extra lead time apply

Finish	58 Cream NCS S 2005-Y20R
	11 Black NCS S 8500-N
	23 Warm White test ral
LED	2700 K
Control	On/Off
Electrical connection	Surface Canopy
Light source	1 x LED 4,48W 350mA E
LED	CRI>90 452.95 lm 100.66 2700 K
Driver	Constant Current 350 mA 100~240 V 50~60 Hz F LED IP20 Bi-volt 50-60Hz
Application	Wall
Packaging	1 Box 0.148 m x 0.161 m x 0.193 m Gross weigth 0.9 kg Net weigth 0.4 kg Vol. 0.0045 m3


Lighting effect


Reading

High intensity, glare-free task lighting



Photometric Data

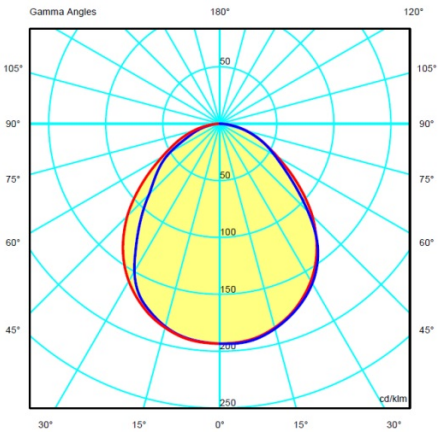

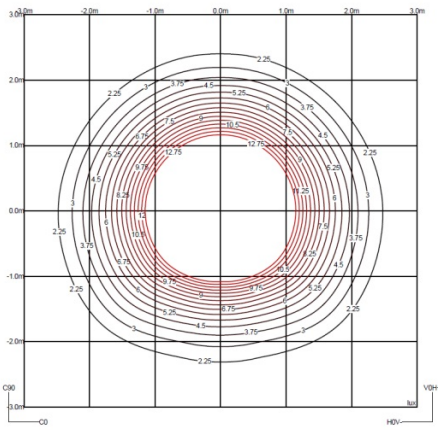

Efficiency	31.88 lm/W
Coordinate System	CG
Total Flux	192.18 lm
Maximum Value	80.54 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Pin

1694


Design By Ichiro Iwasaki

Wall lamp. Design by Ichiro Iwasaki. Wall light which provides passageways with ambient illumination via indirect light. Available in white, black, cream and green matt finishes.

Model Sheet





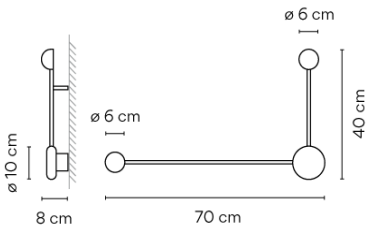

Min. quantity, upcharge and extra lead time apply

Finish

58 Cream
NCS S 2005-Y20R

11 Black
NCS S 8500-N

23 Warm White
test ral

LED 2700 K

Control On/Off

Electrical connection Surface Canopy

Light source 2 x LED 4,48W 350mA

E

LED CRI>90 905.9 lm 100.66
2700 K

Driver Constant Current 350 mA 100~240 V
50~60 Hz

F LED IP20 Bi-volt 50-60Hz


Application Wall

Packaging 1 Box
0.792 m x 0.445 m x 0.177 m
Gross weigth 2.84 kg
Net weigth 1.4 kg
Vol. 0.0623 m3


Lighting effect


360° Surface Grazer

Full-circle grazing light.



Photometric Data

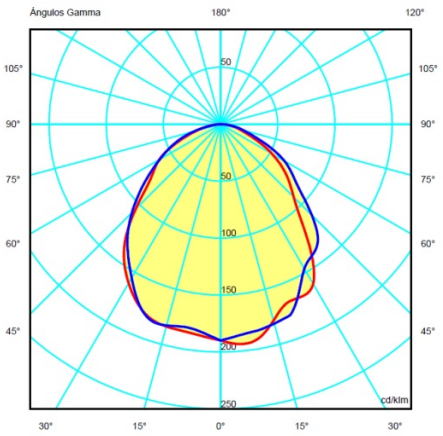

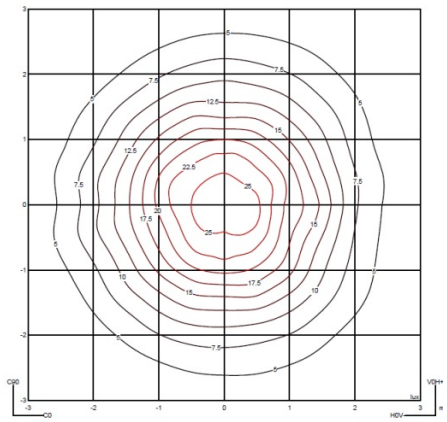

Efficiency	46.35%
Coordinate System	CG
Total Flux	900.00
Maximum Value	192.66

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Pin

1692


Design By Ichiro Iwasaki

Wall lamp. Design by Ichiro Iwasaki. Wall light which provides passageways with ambient illumination via indirect light. Available in white, black, cream and green matt finishes.

Model Sheet







Min. quantity, upcharge and extra lead time apply

Finish

58 Cream
NCS S 2005-Y20R

23 Warm White
test ral

11 Black
NCS S 8500-N

LED 2700 K

Control On/Off

Electrical connection Surface Canopy

Light source 1 x LED 4,48W 350mA

E

LED CRI>90 452.95 lm 100.66
2700 K

Driver Constant Current 350 mA 100~240 V
50~60 Hz


F LED IP20 Bi-volt 50-60Hz

Application Wall


Packaging
1 Box
0.792 m x 0.445 m x 0.177 m
Gross weigth 2.44 kg
Net weigth 1 kg
Vol. 0.0623 m3


Lighting effect
360° Surface Grazer

Full-circle grazing light.



Photometric Data

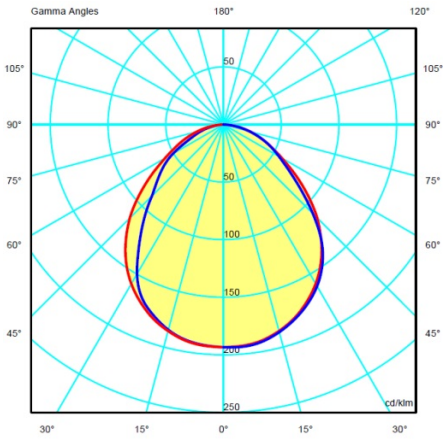

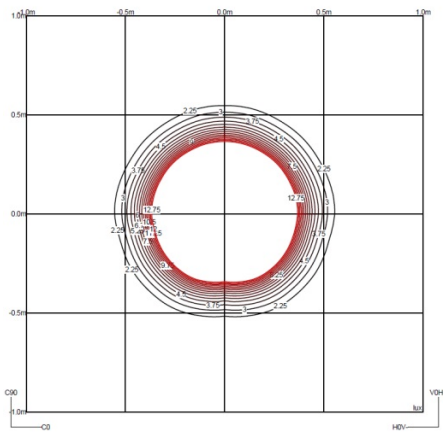

Efficiency	46.31%
Coordinate System	CG
Total Flux	449.94
Maximum Value	193.70

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com