

# kreon aplis in-line

kreon aplis in-line directional is a fully recessed spotlight with a built-in snoot that serves two purposes. Firstly it absorbs stray flux, so aiding beam control, and secondly it provides an integrated mounting ring for the fixation of additional optical lenses for increased optimisation. kreon aplis in-line directional has a rotational adjustment of 360° and an angular adjustment of 30°, which when combined with the choice of spot, flood and wide flood TIR (total internal reflection) reflector, provides a truly versatile accent lighting tool.


kreon aplis in-line fixed is the perfect solution for general lighting and features a flood beam mirror reflector set above the black or white internal louvre, optimised to create pools of light on horizontal surfaces or dramatic scalloping effects on verticals.

kreon aplis in-line wallwasher provides near perfect uniformity on vertical surfaces. This is made possible by the unique optical design that is capable of reflecting light to the very top of adjacent walls through a full 180° beam angle, whilst still maintaining an effective downlight component.

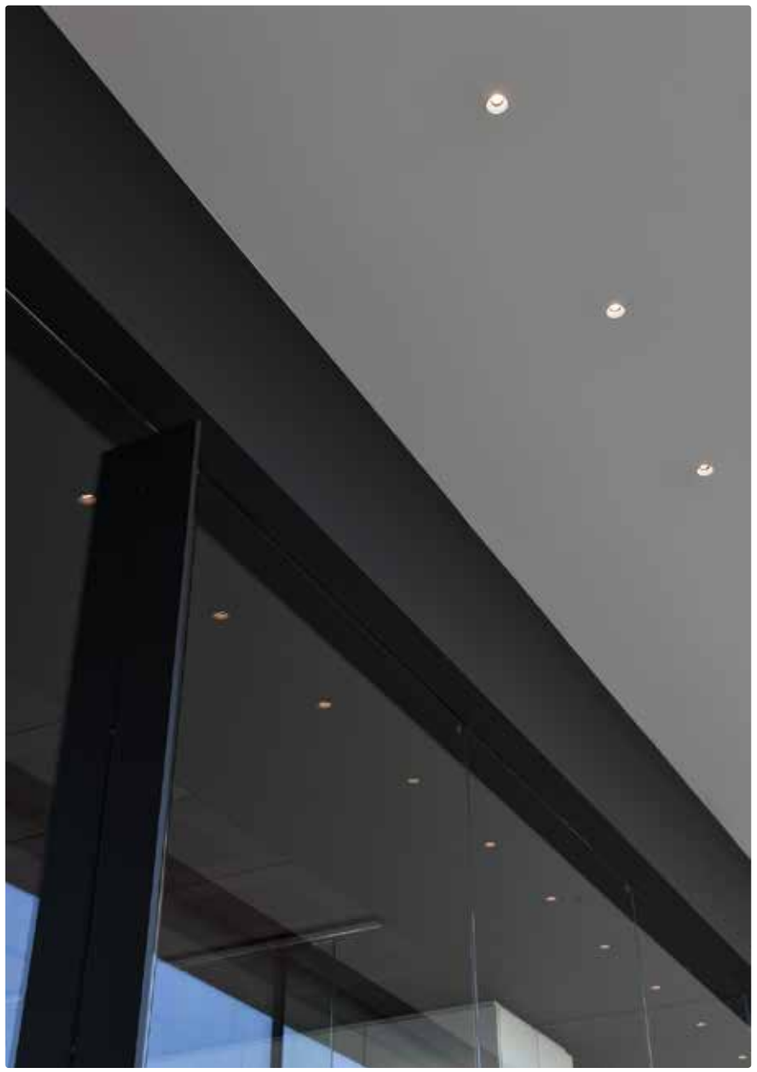

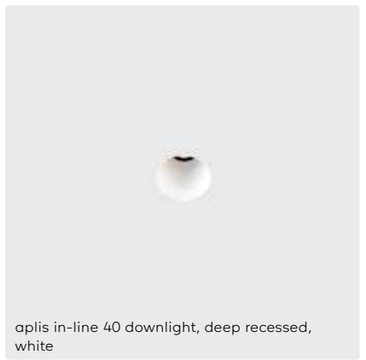


aplis in-line 40 downlight, deep recessed, white

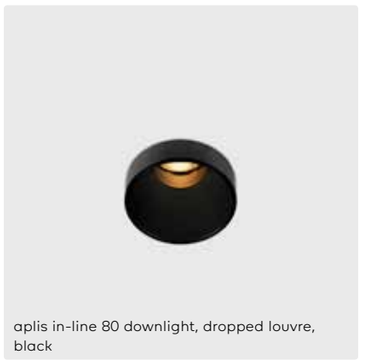

aplis in-line 80 downlight, dropped louvre, black




aplis in-line 120 wallwasher, white

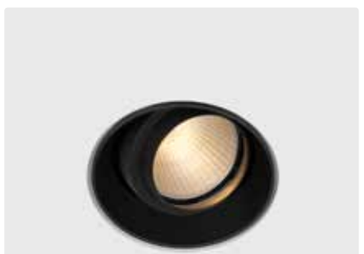


aplis in-line 165 directional, black

# kreon aplis in-line 40


aplis in-line 40 directional




aplis in-line 40 downlight




aplis in-line 40 wallwasher




| | | Colour | KR-code | Light sources | **8027** 2700K, CRI80+ | **8030** 3000K, CRI80+ | **9027** 2700K, CRI90+ | **9030** 3000K, CRI90+ | **SP** Spot (10°) | **FL** Flood (24°) | **WFL** Wide flood (46°) | **OV** Oval (42° + 12°) | Required accessories ❶ | Optional accessories ❶ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | **aplis in-line 40 directional**<br>◔ Ø 63 **H** 80<br>**Glare snoot**: incl. | | KR**907733** | ① | ● | ● | ● | ● | ● | ● | ● | | ■ | ■ |
| | **aplis in-line 40 downlight**<br>◔ Ø 63 **H** 80 | | KR**907033** | ② | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
| | **aplis in-line 40 wallwasher**<br>◔ Ø 63 **H** 80 | ○ | KR**907331** | ③ | ● | ● | ● | ● | | | | | ■ | ■ |
| | | ● | KR**907332** | ③ | ● | ● | ● | ● | | | | | ■ | ■ |

| | CRI | CCT | Wattage | Drive current | Fixture lumen |
|---|---|---|---|---|---|
| ① LED | CRI80+ | 2700K/3000K | 2W | 700mA | 152lm |
| | | | 3,2W | 1050mA | 219lm |
| | CRI90+ | 2700K/3000K | 2W | 700mA | 121lm |
| | | | 3,2W | 1050mA | 143lm |
| ② LED | CRI80+ | 2700K/3000K | 2W | 700mA | 172lm |
| | | | 3,2W | 1050mA | 262lm |
| | CRI90+ | 2700K/3000K | 2W | 700mA | 138lm |
| | | | 3,2W | 1050mA | 172lm |
| ③ LED | CRI80+ | 2700K/3000K | 2W | 700mA | 77lm |
| | | | 3,2W | 1050mA | 90lm |
| | CRI90+ | 2700K/3000K | 2W | 700mA | 47lm |
| | | | 3,2W | 1050mA | 71lm |

**REMARKS**
❶ Find accessories on page 290-291.

Thickness boardmaterial: 9-14mm
Gear excluded.
◈ IP40

■ **Required accessories**

| | | |
|---|---|---|
| Plasterkit | KR**707104** | Plasterkit, no shadowgap |
| Plasterkit concrete | KR**707101** | Plasterkit for concrete installation |
| Louvre | KR**707106** | Louvre, white |
| | KR**707122** | Louvre, black |
| | KR**707105** | Louvre, gun black |
| | KR**707103** | Louvre, red satin copper |
| | KR**707806** | Dropped louvre, white ❷ |
| | KR**707802** | Dropped louvre, black ❷ |
| Louvre IP44 (only for downlight) ❶ | KR**707301** | Louvre IP44, white |
| | KR**707302** | Louvre IP44, black |
| Deep recessed installation (only for downlight) ❷ | KR**707704** | Plasterkit, deep recessed, no shadowgap |
| | KR**707701** | Plasterkit for concrete installation, deep recessed, no shadowgap |
| | KR**707706** | Deep recessed louvre, white |
| | KR**707702** | Deep recessed louvre, black |


■ **Optional accessories**

| | | |
|---|---|---|
| Driver | KR**752730** | LED driver, 700mA, DALI, 10W |
| | KR**772142** | LED driver, 1050mA, 1-10V, 39W |
| | KR**772443** | LED driver, 1050mA, DALI, 15W |
| Distance ring (for plasterkit concrete) | KR**707307** | Distance ring 2mm (set of 5 pcs.) |
| | KR**707308** | Distance ring 3mm (set of 5 pcs.) |
| | KR**707309** | Distance ring 5mm (set of 5 pcs.) |


**REMARKS**
❶ IP44 connection in plenum required.
❷ It's recommended to use a downlight with spot or flood beam.
❸ Driver fits through the installation hole. Other types of dimmable drivers should be placed on remote.
❹ Should be placed on remote.

Thickness boardmaterial:
9-14mm
Gear excluded.
◈ IP40


Plasterkit




Plasterkit concrete




Dropped louvre




Plasterkit deep recessed



Plasterkit concrete deep recessed




Deep recessed louvre




# kreon aplis in-line 80


aplis in-line 80 directional LED




aplis in-line 80 directional LED MR16




aplis in-line 80 directional LED PAR16




| | | KR-code | Light sources | **8327** 2700K, CRI83 | **8330** 3000K, CRI83 | **8340** 4000K, CRI83 | **9027** 2700K, CRI90 | **9030** 3000K, CRI90 | **9040** 4000K, CRI90 | **9827** 2700K, CRI98 | **9830** 3000K, CRI98 | **9840** 4000K, CRI98 | **SP** Spot (18°) | **FL** Flood (28°) | **WFL** Wide flood (48°) | Required accessories | Optional accessories |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|  | **aplis in-line 80 directional LED**<br>◔ Ø 102 **H** 120 ◈<br>**Filter holder**: incl., **glare snoot**: incl. | KR**917933** | ① | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
|  | **aplis in-line 80 directional LED MR16**<br>◔ Ø 102 **H** 110 ◈<br>**Filter holder**: incl., **lamp**: excl., **glare snoot**: incl. | KR**917803** | ② | | | | | | | | | | | | | ■ | ■ |
|  | **aplis in-line 80 directional LED PAR16**<br>◔ Ø 102 **H** 125 ⊡<br>**Filter holder**: incl., **lamp**: excl. , **glare snoot**: incl. | KR**917843** | ③ | | | | | | | | | | | | | ■ | ■ |


| | | CRI | CCT | Voltage | Wattage | Drive current | Fixture lumen |
|---|---|---|---|---|---|---|---|
| ① | LED | CRI83 | 2700K/3000K/4000K | | 15,6W | 700mA | 686lm |
| | | CRI90 | 2700K/3000K/4000K | | 15,6W | 700mA | 686lm |
| | | CRI98 | 2700K/3000K/4000K | | 15,2W | 700mA | 491m |
| ② | LED MR16 | | | 12V | 15W | | |
| ③ | LED PAR16 | | | 230V | 15W | | |

**REMARKS**
Find accessories on page 296-297.


Thickness boardmaterial:
9-26mm
Gear excluded
IP40

# kreon aplis in-line 80


aplis in-line downlight LED





aplis in-line downlight LED MR16




aplis in-line downlight LED PAR16




aplis in-line 80 wallwasher LED




| | Colour | KR-code | Light sources | **8327** 2700K, CRI83 | **8330** 3000K, CRI83 | **8340** 4000K, CRI83 | **9027** 2700K, CRI90 | **9030** 3000K, CRI90 | **9040** 4000K, CRI90 | **9827** 2700K, CRI98 | **9830** 3000K, CRI98 | **9840** 4000K, CRI98 | Required accessories | Optional accessories |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **aplis in-line 80 downlight LED**<br>Ø 102 **H** 100<br>**Wide flood reflector** (45°): incl. | | KR**917033** | ① | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
| **aplis in-line 80 downlight LED MR16**<br>Ø 102 **H** 110<br>**Lamp**: excl. | | KR**917233** | ② | | | | | | | | | | ■ | ■ |
| **aplis in-line 80 downlight LED PAR16**<br>Ø 102 **H** 125<br>**Lamp**: excl. | | KR**917253** | ③ | | | | | | | | | | ■ | ■ |
| **aplis in-line 80 wallwasher LED**<br>Ø 102 **H** 100<br>**Wallwash reflector**: incl. | ○ | KR**917331** | ④ | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
| | ● | KR**917332** | ④ | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |

| | | CRI | CCT | Voltage | Wattage | Drive current | Fixture lumen |
|---|---|---|---|---|---|---|---|
| ① | LED | CRI83 | 2700K/3000K/4000K | | 9,5W | 700mA | 985lm |
| | | CRI90 | 2700K/3000K/4000K | | 11,4W | 700mA | 985lm |
| | | CRI98 | 2700K/3000K/4000K | | 9,2W | 500mA | 731lm |
| ② | LED MR16 | | | 12V | 15W | | |
| ③ | LED PAR16 | | | 230V | 15W | | |
| ④ | LED | CRI83 | 2700K/3000K/4000K | | 9,5W | 700mA | 509lm |
| | | CRI90 | 2700K/3000K/4000K | | 11,4W | 700mA | 509lm |
| | | CRI98 | 2700K/3000K/4000K | | 9,2W | 500mA | 378lm |

**REMARKS**

Find accessories on page 296-297.

Thickness boardmaterial: 9-26mm
Gear excluded
IP40

## ■ Required accessories

| | | |
|---|---|---|
| Plasterkit | KR**717104** | Plasterkit, no shadowgap |
| | KR**717108** | Plasterkit, shadowgap |
| Plasterkit concrete | KR**717101** | Plasterkit for concrete installation, no shadowgap (430x430) |
| | KR**717102** | Plasterkit for concrete installation, no shadowgap, small (200x200) |
| | KR**717109** | Plasterkit for concrete installation, shadowgap (430x430) |
| | KR**717107** | Plasterkit for concrete installation, shadowgap, small (200x200) |
| Louvre | KR**717106** | Louvre, white |
| | KR**717122** | Louvre, black |
| | KR**717105** | Louvre, gun black |
| | KR**717103** | Louvre, red satin copper |
| | KR**717906** | Dropped louvre, white ❶ |
| | KR**717902** | Dropped louvre, black ❶ |
| Louvre IP44 (only for downlight) ❷ | KR**717306** | Louvre IP 44, white |
| | KR**717302** | Louvre IP 44, black |


## ■ Optional accessories

| | | |
|---|---|---|
| Lenses (only for directional) ❸ | KR**704100** | Sculpture lens |
| | KR**704200** | Diffusing lens |
| | KR**704800** | Softening lens |
| | KR**772342** | Anti-glare louvre |
| Driver | KR**772024** | LED driver, 500mA, ON/OFF, 20W |
| | KR**772220** | LED driver, 500mA, 1-10V, 20W |
| | KR**772126** | LED driver, 500mA, DALI, 18W |
| | KR**772432** | LED driver, 500mA, phase dim, 15W |
| | KR**772034** | LED driver, 700mA, ON/OFF, 20W |
| | KR**772232** | LED driver, 700mA, 1-10V, 20W |
| | KR**772236** | LED driver, 700mA, DALI, 18W |
| | KR**772430** | LED driver, 700mA, phase dim, 25W |
| | KR**772431** | LED driver, 700mA, phase dim, 14W |
| Distance ring (for plasterkit concrete) | KR**717307** | Distance ring 2mm (set of 5 pcs.) |
| | KR**717308** | Distance ring 3mm (set of 5 pcs.) |
| | KR**717309** | Distance ring 5mm (set of 5 pcs.) |


**REMARKS**
❶ Use only in combination with spot optic.
❷ IP44 connection in plenum required.
❸ Only one optional lens or louvre possible.
❹ It's recommended to use a spot or flood beam.

Thickness boardmaterial:
9-26mm
Gear excluded
IP40


Plasterkit



Plasterkit concrete




Dropped louvre




# kreon aplis in-line 120


aplis in-line 120 directional




aplis in-line 120 downlight low output




aplis in-line 120 downlight high output




| | KR-code | Light sources | **8327** 2700K, CRI83 | **8330** 3000K, CRI83 | **8340** 4000K, CRI83 | **9027** 2700K, CRI90 | **9030** 3000K, CRI90 | **9040** 4000K, CRI90 | **9827** 2700K, CRI98 | **9830** 3000K, CRI98 | **9840** 4000K, CRI98 | **SP** Spot (12°) | **FL** Flood (28°) | **WFL** Wide flood (34°) | Required accessories ❶ | Optional accessories ❶ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **aplis in-line 120 directional**<br>◔ Ø 144 **H** 140<br>**Filter holder**: incl., **glare snoot**: incl | KR**907933** | ① | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
| **aplis in-line 120 downlight low output**<br>◔ Ø 144 **H** 110<br>**Filter holder**: incl. | KR**907233** | ② | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
| **aplis in-line 120 downlight high output**<br>◔ Ø 144 **H** 130 | KR**907243** | ③ | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ■ | ■ |


| | | | CRI | CCT | Wattage | Drive current | Fixture lumen |
|---|---|---|---|---|---|---|---|
| ① | LED | **SP** | CRI83 | 2700K/3000K/4000K | 15,6W | 700mA | 1274lm |
| | | | CRI90 | 2700K/3000K/4000K | 15,6W | 700mA | 800lm |
| | | | CRI98 | 2700K/3000K/4000K | 15,2W | 700mA | 573lm |
| | | **FL& WFL** | CRI83 | 2700K/3000K/4000K | 15,2W | 700mA | 1021lm |
| | | | CRI90 | 2700K/3000K/4000K | 17,1W | 700mA | 987lm |
| | | | CRI98 | 2700K/3000K/4000K | 12,9W | 700mA | 691lm |
| ② | LED | **SP** | CRI83 | 2700K/3000K/4000K | 15,6W | 700mA | 1114lm |
| | | | CRI90 | 2700K/3000K/4000K | 15,6W | 700mA | 1004lm |
| | | | CRI98 | 2700K/3000K/4000K | 15,2W | 700mA | 839lm |
| | | **FL& WFL** | CRI83 | 2700K/3000K/4000K | 15,2W | 700mA | 1666lm |
| | | | CRI90 | 2700K/3000K/4000K | 17,1W | 700mA | 1609lm |
| | | | CRI98 | 2700K/3000K/4000K | 12,9W | 700mA | 1127lm |
| ③ | LED | | CRI83 | 2700K/3000K/4000K | 25,6W | 1050mA | 2610lm |
| | | | CRI90 | 2700K/3000K/4000K | 25,7W | 1050mA | 2430lm |
| | | | CRI98 | 2700K/3000K/4000K | 20W | 1050mA | 1605lm |

**REMARKS**
❶ Find accessories on page 302-303.


Thickness boardmaterial: 9-26mm
Gear excluded.
◈ IP40

# kreon aplis in-line 120

aplis in-line 120 wallwasher low output




aplis in-line 120 wallwasher high output




| | Colour | KR-code | Light sources | 8327 2700K, CRI83 | 8330 3000K, CRI83 | 8340 4000K, CRI83 | 9027 2700K, CRI90 | 9030 3000K, CRI90 | 9040 4000K, CRI90 | 9827 2700K, CRI98 | 9830 3000K, CRI98 | 9840 4000K, CRI98 | Required accessories ❶ | Optional accessories ❶ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **aplis in-line 120 wallwasher low output**<br>◔ Ø 144 **H** 150<br>**Wallwash reflector:** incl. | ○ | KR**907531** | ① | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
| | ● | KR**907532** | ① | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
| **aplis in-line 120 wallwasher high output**<br>◔ Ø 144 **H** 170<br>**Wallwash reflector:** incl. | ○ | KR**905431** | ② | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
| | ● | KR**905432** | ② | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |

| | CRI | CCT | Wattage | Drive current | Fixture lumen |
|---|---|---|---|---|---|
| ① LED | CRI83 | 2700K/3000K/4000K | 15,2W | 700mA | 937lm |
| | CRI90 | 2700K/3000K/4000K | 17,1W | 700mA | 906lm |
| | CRI98 | 2700K/3000K/4000K | 12,9W | 700mA | 633lm |
| ② LED | CRI83 | 2700K/3000K/4000K | 25,6W | 1050mA | 1385lm |
| | CRI90 | 2700K/3000K/4000K | 25,7W | 1050mA | 1275lm |
| | CRI98 | 2700K/3000K/4000K | 20W | 1050mA | 840lm |

**REMARKS**
❶ Find accessories on page 302-303.

Thickness boardmaterial: 9-26mm
Gear excluded.
◈ IP40

## ■ Required accessories

| | | |
|---|---|---|
| Plasterkit | KR**707204** | Plasterkit, no shadowgap |
| | KR**707208** | Plasterkit, shadowgap |
| Plasterkit concrete | KR**707201** | Plasterkit for concrete installation, no shadowgap |
| | KR**707209** | Plasterkit for concrete installation, shadowgap |
| Louvre | KR**707206** | Louvre, white |
| | KR**707222** | Louvre, black |
| Louvre IP44 (only for downlight) ❶ | KR**707406** | Louvre IP 44, white |
| | KR**707402** | Louvre IP 44, black |


## ■ Optional accessories

| | | |
|---|---|---|
| Lenses (only for directional) ❷ | KR**750100** | Sculpture lens |
| | KR**750200** | Diffusing lens |
| | KR**750800** | Softening lens |
| Driver | KR**772034** | LED driver, 700mA, ON/OFF, 20W |
| | KR**772232** | LED driver, 700mA, 1-10V, 20W |
| | KR**772236** | LED driver, 700mA, DALI, 18W |
| | KR**772430** | LED driver, 700mA, phase dim, 25W |
| | KR**772140** | LED driver, 1050mA, ON/OFF, 36W |
| | KR**772142** | LED driver, 1050mA, 1-10V, 39W |
| | KR**772143** | LED driver, 1050mA, DALI, 35W |
| Distance ring (for plasterkit concrete) | KR**707407** | Distance ring 2mm (set of 5 pcs.) |
| | KR**707408** | Distance ring 3mm (set of 5 pcs.) |
| | KR**707409** | Distance ring 5mm (set of 5 pcs.) |


**REMARKS**
❶ IP 44 connection in plenum required.
❷ Only one optional lens or louvre possible.
Use only in combination with spot optic.

Thickness boardmaterial:
9-26mm
Gear excluded.
◈ IP40

Plasterkit




Plasterkit concrete




# kreon aplis in-line 165

aplis in-line 165 directional low output




aplis in-line 165 directional high output




| | | KR-code | Light sources | 8327 2700K, CRI83 | 8330 3000K, CRI83 | 8340 4000K, CRI83 | 9027 2700K, CRI90 | 9030 3000K, CRI90 | 9040 4000K, CRI90 | 9827 2700K, CRI98 | 9830 3000K, CRI98 | 9840 4000K, CRI98 | Required accessories | Optional accessories |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|  | **aplis in-line 165 directional low output**<br>◔ Ø 186 **H** 230<br>**Filter holder**: incl., **glare snoot**: incl. | KR**917833** | ① | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
|  | **aplis in-line 165 directional high output**<br>◔ Ø 186 **H** 250<br>**Filter holder**: incl., **glare snoot**: incl. | KR**917343** | ② | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |

**■ Required accessories**

| | | |
|---|---|---|
| Plasterkit | KR**717204** | Plasterkit, no shadowgap |
| | KR**717208** | Plasterkit, shadowgap |
| Plasterkit concrete | KR**717201** | Plasterkit for concrete installation, no shadowgap |
| | KR**717209** | Plasterkit for concrete installation, shadowgap |
| Louvre | KR**717206** | Louvre, white |
| | KR**717222** | Louvre, black |
| Reflector | KR**720032** | Reflector LED, spot 13° |
| | KR**720034** | Reflector LED, flood 23° |
| | KR**720036** | Reflector LED, wide flood 40° |

**■ Optional accessories**


| | | |
|---|---|---|
| Lenses ❶ | KR**720100** | Sculpture lens |
| | KR**720200** | Diffusing lens |
| | KR**720800** | Softening lens |
| Driver | KR**772024** | LED driver, 500mA, ON/OFF, 20W |
| | KR**772220** | LED driver, 500mA, 1-10V, 20W |
| | KR**772126** | LED driver, 500mA, DALI, 18W |
| | KR**772034** | LED driver, 700mA, ON/OFF, 20W |
| | KR**772232** | LED driver, 700mA, 1-10V, 20W |
| | KR**772236** | LED driver, 700mA, DALI, 18W |
| | KR**772140** | LED driver, 1050mA, ON/OFF, 36W |
| | KR**772142** | LED driver, 1050mA, 1-10V, 39W |
| | KR**772143** | LED driver, 1050mA, DALI, 35W |

| | CRI | CCT | Wattage | Drive current | Fixture lumen |
|---|---|---|---|---|---|
| ① LED | CRI83 | 2700K/3000K/4000K | 15,2W | 700mA | 1250lm |
| | CRI90 | 2700K/3000K/4000K | 16,5W | 700mA | 1250lm |
| | CRI98 | 2700K/3000K/4000K | 13,9W | 500mA | 988lm |
| ② LED | CRI83 | 2700K/3000K/4000K | 25,7W | 1050mA | 1874lm |
| | CRI90 | 2700K/3000K/4000K | 25,7W | 1050mA | 1874lm |
| | CRI98 | 2700K/3000K/4000K | 20W | 1050mA | 1249lm |


**REMARKS**
❶ Only one optional lens or louvre possible.
❷ Use only in combination with spot optic.

Thickness boardmaterial:
9-26mm
Gear excluded.
◈ IP40

Plasterkit




Plasterkit concrete




# kreon aplis in-line 165

aplis in-line 165 wallwasher low output




aplis in-line 165 wallwasher high output




| | | Colour | KR-code | Light sources | 8327 2700K, CRI83 | 8330 3000K, CRI83 | 8340 4000K, CRI83 | 9027 2700K, CRI90 | 9030 3000K, CRI90 | 9040 4000K, CRI90 | 9827 2700K, CRI98 | 9830 3000K, CRI98 | 9840 4000K, CRI98 | Required accessories | Optional accessories |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|  | **aplis in-line 165 wallwasher low output**<br>◔ Ø 186 **H** 200 | ○ | KR**917431** | ① | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
| | | ● | KR**917432** | ① | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
|  | **aplis in-line 165 wallwasher high output**<br>◔ Ø 186 **H** 210 | ○ | KR**917441** | ② | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |
| | | ● | KR**917442** | ② | ● | ● | ● | ● | ● | ● | ● | ● | ● | ■ | ■ |

**■ Required accessories**

| | | |
|---|---|---|
| Plasterkit | KR**717204** | Plasterkit, no shadowgap |
| | KR**717208** | Plasterkit, shadowgap |
| Plasterkit concrete | KR**717201** | Plasterkit for concrete installation, no shadowgap |
| | KR**717209** | Plasterkit for concrete installation, shadowgap |
| Louvre | KR**717206** | Louvre, white |
| | KR**717222** | Louvre, black |

**■ Optional accessories**


| | | |
|---|---|---|
| Driver | KR**772024** | LED driver, 500mA, ON/OFF, 20W |
| | KR**772220** | LED driver, 500mA, 1-10V, 20W |
| | KR**772126** | LED driver, 500mA, DALI, 18W |
| | KR**772034** | LED driver, 700mA, ON/OFF, 20W |
| | KR**772232** | LED driver, 700mA, 1-10V, 20W |
| | KR**772236** | LED driver, 700mA, DALI, 18W |
| | KR**772140** | LED driver, 1050mA, ON/OFF, 36W |
| | KR**772142** | LED driver, 1050mA, 1-10V, 39W |
| | KR**772143** | LED driver, 1050mA, DALI, 35W |

| | CRI | CCT | Wattage | Drive current | Fixture lumen |
|---|---|---|---|---|---|
| ① LED | CRI83 | 2700K/3000K/4000K | 15,2W | 700mA | 756lm |
| | CRI90 | 2700K/3000K/4000K | 16,5W | 700mA | 756lm |
| | CRI98 | 2700K/3000K/4000K | 13,9W | 500mA | 597lm |
| ② LED | CRI83 | 2700K/3000K/4000K | 25,7W | 1050mA | 1161lm |
| | CRI90 | 2700K/3000K/4000K | 25,7W | 1050mA | 1161lm |
| | CRI98 | 2700K/3000K/4000K | 20W | 1050mA | 774lm |

**REMARKS**

Thickness boardmaterial:
9-26mm
Gear excluded.
◈ IP40

Plasterkit



Plasterkit concrete

