

CETO CIRCLET

CHANDELIER

Ceto Circlet captures the variation and rippling of the surface of the ocean. Each piece is mouth blown, reflecting a distinct pattern that emits a delicate luminosity, evoking the presence of the sea and its undulating movements. The Ceto Circlet collection features a circular band suspended in a horizontal plane, to which several Ceto lamps are affixed.

AVAILABLE FINISHES


FROSTED BLACK GLASS · BLACK GLASS · CLEAR GLASS · WHITE GLASS · BLACK ANODISED · CHAMPAGNE ANODISED

TECHNICAL


MATERIAL	ANODISED ALUMINIUM, GLASS	
LAMPING	SELV 60V (EXTERNAL DRIVER SUPPLIED) CC809 - 17W, 2700K CC1412 - 25W, 2700K CC2015 - 30W, 2700K WATTAGE AND LUMEN OUTPUT WILL VARY SLIGHTLY DEPENDING ON CONSTANT CURRENT OUTPUT.	
	LUMEN OUTPUT PER SHADE	
	CLEAR - 440LM	WHITE - 430LM
	BLACK - 230LM	FROSTED BLACK - 130LM
DIMMING OPTIONS	220-240V REGION	
	PHASE	- DIMMING RANGE 5 - 100%
	DALI	- DIMMING RANGE 1 - 100%
	110-120V REGION	
	PHASE	- DIMMING RANGE 3 - 100%
	DALI	- DIMMING RANGE 0.1 - 100%
	ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS.	
	FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.	
DRIVER SIZE		
220 -240V	PHASE / TRIAC	
	CC809 & CC1412	- L130 X W68 X H31 / L5.1" X W2.7" X H1.2"
	CC2015	- L140 X W40 X H23 / L5.5" X W1.6" X H0.9"
	DALI	
	ALL CC	- L97 X W43 X H30 / L3.8" X W1.7" X H1.2"
110-120V	PHASE / TRIAC	
	ALL CC	- L121 X W44 X H26.5 / L4.8"' X W1.7" X H1"
	DALI	
	ALL CC	- L121 X W44 X H26.5 / L4.8"' X W1.7" X H1"

LED LIFESPAN	50,000 HRS	
IP RATING	IP20 - FOR INDOOR USE ONLY	
CERTIFICATION	AU/NZ	AS/NZS 60598.1, 60598.2.1
	EU	EN 60598.1, 60598.2.1
	US/CAN	ETL/UL 1598, CSA C22.2#250.0
CORD	3000 / 9'10" CLEAR COAXIAL CABLE	
SUSPENSION	3 X 3000 / 9'10" Ø1.2MM STAINLESS STEEL WIRE *LONGER LENGTHS AVAILABLE UPON REQUEST	
CANOPY	VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE	
SKU CODES	EG. CC809.G-BLK.A-BLK CETO 809 CIRCLET IN BLACK GLASS WITH BLACK ANODISED BODY	
	CC809.G-XXX.A-XXX	CETO 809 CIRCLET
	CC1412.G-XXX.A-XXX	CETO 1412 CIRCLET
	CC2015.G-XXX.A-XXX	CETO 2015 CIRCLET
FINISHES		
GLASS	FROSTED BLACK (G-FBK)	BLACK (G-BLK)
	CLEAR (G-CLR)	WHITE (G-WHT)
BODY	BLACK ANODISED (A-BLK) / CHAMPAGNE ANODISED (A-CHM)	
DIMENSIONS	VARIOUS - SEE DIMENSIONS ON FOLLOWING PAGE*	
PRODUCT WEIGHT	CC809	23KG / 51LB
	CC1412	32KG / 70LB
	CC2015	42KG / 93LB
PACKAGING DIMENSIONS	CC809	L 900 W 900 H 350 / L 2'11" W 2'11" H 1'2"
	CC1412	L 1000 W 750 H 350 / L 3'3" W 2'6" H 1'2"
	CC2015	L 1250 W 750 H 350 / L 4'1" W 2'6" H 1'2"
PACKAGING WEIGHT	CC809	27KG / 60LB
	CC1412	38KG / 84LB
	CC2015	50KG / 110LB

DIMENSIONS




CC809
Ø 980 H 200 RING Ø 800
Ø 3'3" H 7.9" RING Ø 2'7.5"
MIN DROP HEIGHT - H 600 / 2'

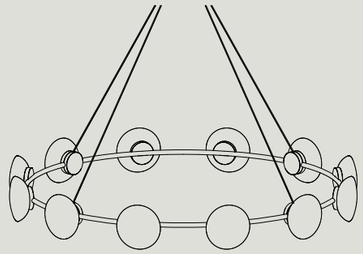

CC1412
Ø 1575 H 200 RING Ø 1400
Ø 5'2" H 7.9" RING Ø 4' 7"
MIN DROP HEIGHT - H 900 / 2'11"

MIN DROP HEIGHT CENTRAL CANOPY = H900 / 2'11"
MIN DROP HEIGHT INDIVIDUAL CANOPY = H600 / 2"

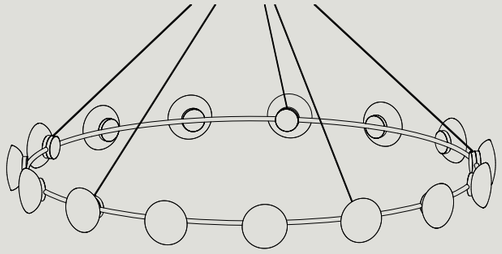

CC2015
Ø 2175 H 200 RING Ø 2000
Ø 7'2" H 7.9" RING Ø 6' 7"
MIN DROP HEIGHT - H 1200 / 3'11"

MIN DROP HEIGHT CENTRAL CANOPY = H1200 / 3'11"
MIN DROP HEIGHT INDIVIDUAL CANOPY = H600 / 2"

*HANG HEIGHT NEEDS TO BE CONFIRMED PRIOR TO PRODUCTION.
*POWER ACCESS POINT REQUIRED AT CENTRE OF CEILING CANOPY.

AVAILABLE CANOPIES

ALL ROSS GARDAM CEILING MOUNTED FIXTURES COME SUPPLIED WITH A CEILING CANOPY UNLESS OTHERWISE SPECIFIED. EACH CANOPY INCLUDES ELECTRICAL CONNECTORS, EARTH WIRE AND CABLE RETENTION TO CONNECT TO MAINS POWER. THE BELOW IMAGES DEPICT THE CEILING CANOPIES AVAILABLE WITH EACH FIXTURE TYPE. IF NO CANOPY IS SELECTED, THE STANDARD CANOPY (NON US/CAN REGION) OR LARGE CANOPY (US/CAN) WILL BE SUPPLIED.

CENTRAL CANOPY



CENTRAL
SUSPENSION + COAXIAL CANOPY
CAN.ST.CC809.X-XXX

Ø170 X 40MM / 6.7" X 1.6"

DRIVER HOUSED IN CANOPY



CENTRAL
SUSPENSION + COAXIAL CANOPY
CAN.ST.CC.1412.X-XXX

Ø170 X 40MM / 6.7" X 1.6"

DRIVER HOUSED IN CANOPY



CENTRAL
SUSPENSION + COAXIAL CANOPY
CAN.ST.CC2015.X-XXX

Ø170 X 40MM / 6.7" X 1.6"

DRIVER HOUSED IN CANOPY

14MM TUBE (INDIVIDUAL CANOPY)



STANDARD
Ø14MM FIXED CANOPY
CAN.ST.120.F14.X-XXX

Ø120 X 30MM / 4.7" X 1.2"

DRIVER HOUSED IN CEILING



STANDARD
Ø14MM FIXED SWIVEL CANOPY
CAN.ST.120.F14.SW.X-XXX

Ø120 X 30MM / 4.7" X 1.2"

DRIVER HOUSED IN CEILING



LARGE
Ø14MM FIXED CANOPY
CAN.ST.170.F14.X-XXX

Ø170 X 40MM / 6.7" X 1.6"

DRIVER HOUSED IN CANOPY



LARGE
Ø14MM FIXED SWIVEL CANOPY
CAN.ST.170.F14.SW.X-XXX

Ø170 X 40MM / 6.7" X 1.6"

DRIVER HOUSED IN CANOPY



SLIM
Ø14MM FIXED CANOPY
CAN.SL.F14.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

DRIVER HOUSED IN CEILING



SLIM
Ø14MM FIXED SWIVEL CANOPY
CAN.SL.F14.SW.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

DRIVER HOUSED IN CEILING



PUCK
Ø14MM FIXED CANOPY
CAN.PK.F14.X-XXX

Ø50 X 65MM / 2" X 2.6"

DRIVER HOUSED IN CEILING
*US/CAN ORDERS TO BE INSTALLED WITH SUPPLIED JUNCTION BOX RENDER MOUNTING PLATE



PUCK
Ø14MM FIXED SWIVEL CANOPY
CAN.PK.F14.SW.X-XXX

Ø50 X 65MM / 2" X 2.6"

DRIVER HOUSED IN CEILING
*US/CAN ORDERS TO BE INSTALLED WITH SUPPLIED JUNCTION BOX RENDER MOUNTING PLATE

VERTICAL CABLE (INDIVIDUAL CANOPY)



STANDARD
SUSPENSION + COAXIAL CANOPY
CAN.ST.120.CX.X-XXX

Ø120 X 30MM / 4.7" X 1.2"

DRIVER HOUSED IN CEILING



LARGE
SUSPENSION + COAXIAL CANOPY
CAN.ST.170.CX.X-XXX

Ø170 X 40MM / 6.7" X 1.6"

DRIVER HOUSED IN CANOPY



SLIM
SUSPENSION + COAXIAL CANOPY
CAN.SL.CX.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

DRIVER HOUSED IN CEILING



PUCK
SUSPENSION + COAXIAL CANOPY
CAN.PK.CX.X-XXX

Ø50 X 65MM / 2" X 2.6"

DRIVER HOUSED IN CEILING
*US/CAN ORDERS TO BE INSTALLED WITH SUPPLIED JUNCTION BOX RENDER MOUNTING PLATE

TECHNICAL

MATERIAL	ANODISED ALUMINIUM
CANOPY FINISH	ANODISED BLACK (A-BLK) ANODISED CHAMPAGNE (A-CHM)
SKU CODES	EG. CAN.ST.CC809.A-CHM = STANDARD 809 SUSPENSION + COAXIAL CANOPY IN CHAMPAGNE ANODISED FINISH

BLACK ANODISED

CHAMPAGNE ANODISED