THIN Linear — Surface Mount.

Updt: 07/09/2026

Updt: 07/09/2026

Patent www.juniperdesign.com/patents/

Patent www.juniperdesign.com/patents/

JUNIPERDESIGN.COM +1-347-799-2915 SALES@JUNIPERDESIGN.COM


Upd: 07/09/2026

OVERVIEW




- Light segments in various lengths can be mounted individually or to each other — using snap-in magnetic stand-off connectors — to create linear fixture configurations up to 24 ft (nominal)
- Segments can individually rotate 360°
- 24 VDC output Class 2 constant voltage power supply
- 120–277 VAC input voltage
- Dimming options: 2-Wire/TRIAC/Forward Phase; 0–10 V; 3-Wire
- Wall brackets / standoffs mount directly to surface
- Standoff distances from wall are ideal for applications such as undercabinet lighting, vanity/display lighting, and picture lighting

- CRI 95+
- R9 90+
- 90 LM/W delivered efficacy
- 300 LM per linear foot (maximum)
- Frosted lens with 90° beam spread



Example:
JPR-THEW-MONO-XXX-090-000044-XX-XX
8′ nominal (2 light segments)

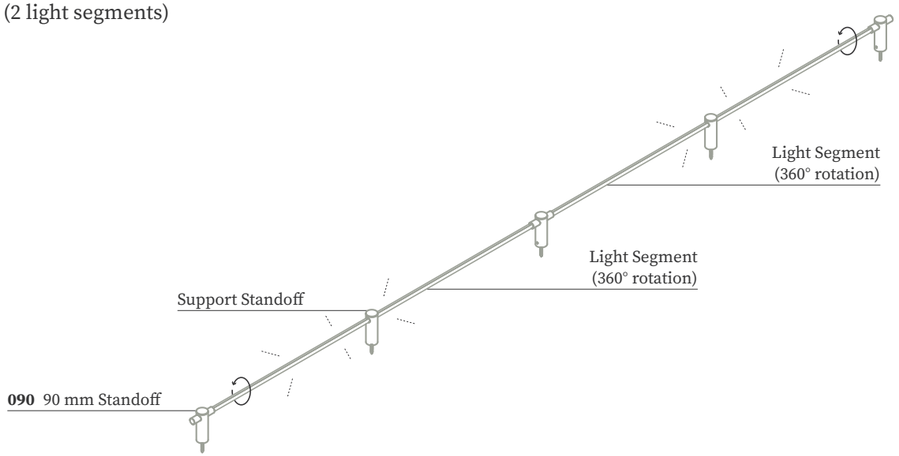

DAMP RATED

Patent www.juniperdesign.com/patents/

SYSTEM SPECIFICATIONS THIN Linear — Surface Mount.

Upd: 07/09/2026

SPECIFICATION BUILDER

JPR-THEW-MONO- [1] - [2] - [3] - [4] - [5]


1. Mounting	2. Standoff Length	3. Segments
SMR Surface Mount Remote Power Supply not included	**045** 45 mm (undercabinets)	**000002** 2′
SMP Surface Mount Remote Power Supply included	**090** 90 mm (vanities & displays)	**000003** 3′
SMD Surface Mount Plug-in Power Supply included	**180** 180 mm (picture lighting)	**000004** 4′
		000005 5′
		000006 6′
		000044 8′
		000333 9′
		000055 10′
		000066 12′
		000555 15′
		004444 16′
		000666 18′
		005555 20′
		006666 24′

See pages 40–42 for mounting/spacing configurations and dimensions for various fixture lengths.

4. CCT	5. Finish
27 2700 K	**01** SGN Satin Brass
30 3000 K	**02** SGN Black Oxide
35 3500 K	**03** SGN Satin Nickel
40 4000 K	**40** SGN English Bronze
	30 PRO Matte Pure White
	32 PRO Matte Black
	33 PRO Satin Aluminum
	CU PRO Custom

See Finishes for additional options.

MOUNTING OPTION



Mounting Bracket

For detailed photometrics, see Photometric Data.
IES files available.


DAMP RATED


Patent www.juniperdesign.com/patents/

Upd: 07/09/2026

SYSTEM LOGIC

Example:
JPR-THEW-MONO-XXX-090-000044-XX-XX
8′ nominal (2 light segments)

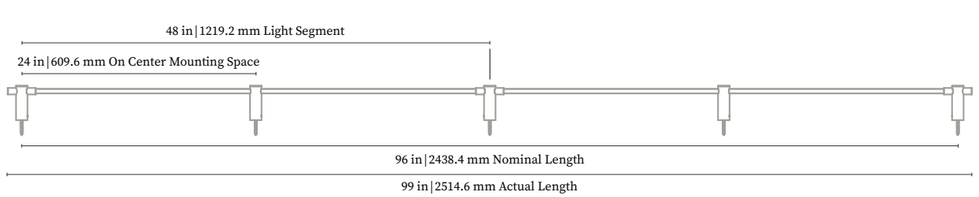



DAMP RATED

Patent www.junipердesign.com/patents/

SYSTEM SPECIFICATIONS THIN Linear — Surface Mount.

Upd: 07/09/2026

CONFIGURATIONS — DATA

1. SKU	2. Nominal Length	3. Actual Length	4. Quantity of Light Segments	5. On Center Mounting Space	6. Quantity of Mounting Points	7. Total Wattage (W)	8. LM
000002	2'	26.875 in	1	24 in	2	6.8	600
000003	3'	38.875 in	1	36 in	2	9.6	920
000004	4'	50.875 in	1	24 in	3	13.1	1240
000005	5'	62.875 in	1	30 in	3	16.6	1560
000006	6'	74.875 in	1	36 in	3	20	1900
000044	8'	98.875 in	2	24 in	5	26.2	2480
000333	9'	110.875 in	3	36 in	4	29.1	2760
000055	10'	122.875 in	2	30 in	5	33.2	3120
000066	12'	146.875 in	2	36 in	5	40	3800
000555	15'	182.875 in	3	30 in	7	49.8	4680
004444	16'	194.875 in	4	24 in	9	52.4	4960
000666	18'	218.875 in	3	36 in	7	60	5700
005555	20'	242.875 in	4	30 in	9	66.4	6240
006666	24'	290.875 in	4	36 in	9	80	7600

For the configuration drawings, see page 42.


For detailed photometrics, see Photometric Data.
IES files available.

DAMP RATED


Patent www.junipердesign.com/patents/

Upd: 07/09/2026


CONFIGURATIONS — DIAGRAMS



000002
2 ft nominal



000003
3 ft nominal



000004
4 ft nominal



000005
5 ft nominal



000006
6 ft nominal



000044
8 ft nominal



000333
9 ft nominal



000055
10 ft nominal



000066
12 ft nominal



000555
15 ft nominal



004444
16 ft nominal



000666
18 ft nominal



005555
20 ft nominal



006666
24 ft nominal

DAMP RATED

Patent www.juniperdesign.com/patents/

SYSTEM SPECIFICATIONS THIN Linear — Surface Mount.

Upd: 07/09/2026

INTENTIONALLY LEFT BLANK

DAMP RATED

Patent www.juniperdesign.com/patents/