
ZERO TRACK

DESIGNED BY FLOS ARCHITECTURAL

SURFACE

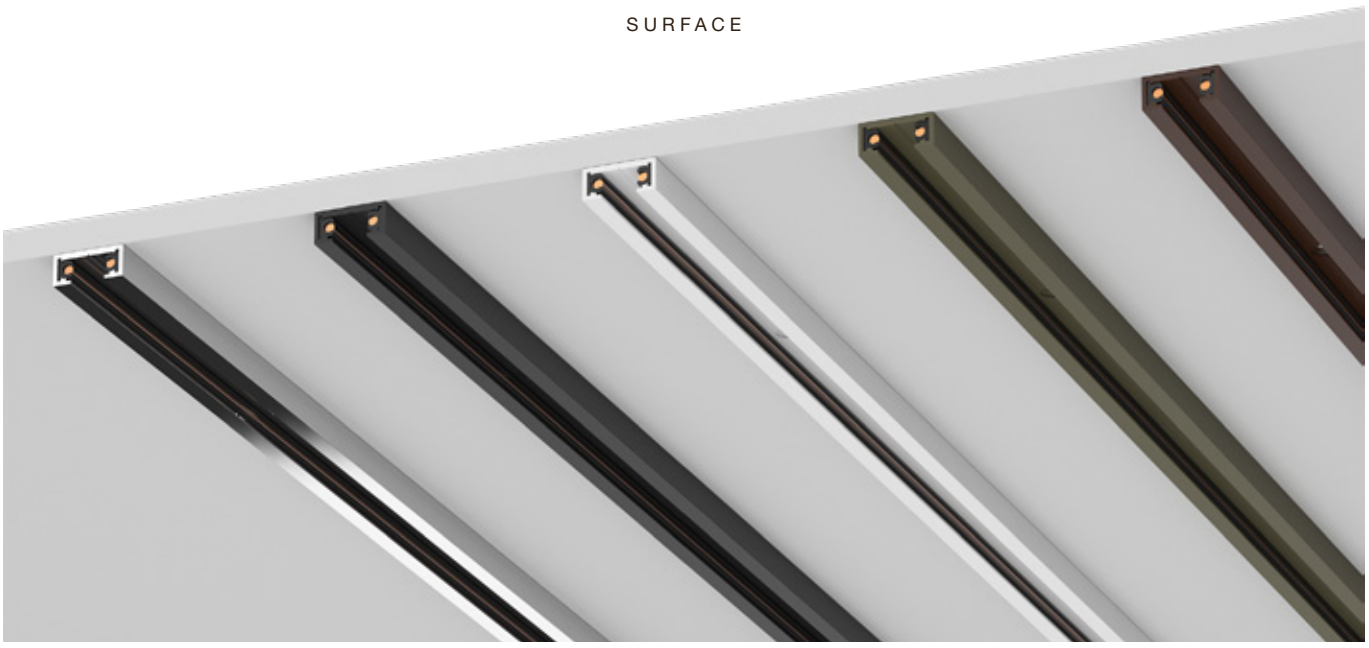

Surface Profiles

- 40 Bianco / 40 White
- 06 Cromo / 06 Chrome
- 14 Nero / 14 Black
- CZ Bronzo / CZ Bronze
- 18 Deep brown / 18 Deep brown

LIGHT MODULES

FIND ME 0



LIGHT SOURCE
POWER LED
3,5W
300 lm
2700K/CRI 90
325 lm
3000K/CRI 90

FIND ME 1



LIGHT SOURCE
POWER LED
5,5W
450 lm
2700K/CRI 90
485 lm
3000K/CRI 90

FIND ME 2



LIGHT SOURCE
POWER LED
10,5W
650 lm
2700K/CRI 90
700 lm
3000K/CRI 90

FIND ME 1 SUSPENSION



LIGHT SOURCE
POWER LED
5,5W
450 lm
2700K/CRI 90
485 lm
3000K/CRI 90

ATOM 90



LIGHT SOURCE
POWER LED
5,5W
450 lm
2700K/CRI 90
485 lm
3000K/CRI 90

ATOM 120



LIGHT SOURCE
POWER LED
8W
635 lm
2700K/CRI 90
680 lm
3000K/CRI 90

ATOM 200



LIGHT SOURCE
POWER LED
10,5W
1050 lm
2700K/CRI 90
1150 lm
3000K/CRI 90

ZERO TRACK

Descrizione
Questo nuovo sistema di profili per installazione a superficie è caratterizzato da dimensioni ridotte che conferiscono un'estetica minimalista molto apprezzata in svariati spazi architettonici. Per soluzioni a soffitti non accessibili, il sistema è fornito con fonti di alimentazione attenuabili integrate, con un sistema di controllo Casambi.
Il sistema Casambi che regola l'illuminazione di ciascun punto in modo individuale via buetooht usa l'APP FLOS Control® powered di Casambi, l'applicazione specifica per dispositivi cellulari (disponibile su Apple Store e Google Play).
Il sistema a guide di alluminio estruso è fornito con lunghezza fino a 3m e nei colori bianco, nero, deep brown, bronzo e cromo.
Sono dotati di binari elettrificati alimentabili a 24 Vdc.

Sistema Ottico
- Find Me 0: Spot, Medium.
- Find Me 1: Spot, Medium.
- Find Me 2: Spot, Medium, Flood.
- Find Me 1 Suspension: Spot, Medium.
- Atom 90: Spot, Medium.
- Atom 120: Spot, Medium.
- Atom 200: General lighting.

Unità di Alimentazione
Il sistema può essere alimentato da una fonte remota non inclusa o con l'apparecchiatura di alimentazione da inserire nella guida, fornita con una fonte di alimentazione.
Il connettore di alimentazione iniziale dispone di uno spazio per l'ingresso dei cavi sia nella parte superiore che in quella laterale. Il connettore di alimentazione, l'alimentatore intermedio e gli elementi angolari di 90° si possono alimentare esclusivamente dal retro.
La lunghezza massima della pista con lo stesso driver è di 10 metri.

Informazioni Aggiuntive
Sistema elettrico alimentato a 24V e limitato ad una corrente massima di 5A e 120W.
Grado di protezione IP20.
Adatti ad installazioni su superfici normalmente infiammabili.

Prima di effettuare l'ordine, si consiglia di informarsi per bene sulle caratteristiche del prodotto che non sono state incluse in questo catalogo e che possono essere determinanti per il suo progetto di installazione, consultando la pagina web di Flos per professionisti, la scheda tecnica del prodotto e le istruzioni per la sua installazione e montaggio.

Conformità e Marchi di Qualità
Apparecchio conforme alla Normativa Tecnica Europea EN60598-1 e relative parti seconde.

Description
This new system of profiles for surface installation is characterized by its reduced dimensions, providing a minimalist aesthetic which is highly appreciated in various architectural spaces. For non-accessible ceilings, the system has integrated dimmable power supplies, dimmable through Casambi control systems.
The Casambi system for individual Bluetooth dimming of each light point can be managed through the FLOS Control® app powered by Casambi for mobile devices (available on the Apple Store and Google Play).
The system of extruded aluminum tracks up to 3 meters in white, black, deep brown bronze and chrome.
They are equipped with electric tracks supporting 24Vdc power supplies.

Optic system
- Find Me 0: Spot, Medium.
- Find Me 1: Spot, Medium.
- Find Me 2: Spot, Medium, Flood.
- Find Me 1 Suspension: Spot, Medium.
- Atom 90: Spot, Medium.
- Atom 120: Spot, Medium.
- Atom 200: General lighting.

Power Supply
The system can be powered by a remote power supply (not included) or by power supply equipments to be inserted in the track, which include a power supply.
The initial power connector has a space for cable insertion through both the upper and side parts. The power connector, middle power supply and 90° corners can be powered only from the back.
The maximum length of the track with the same driver is 10 meters.

Additional Information
Electrical system powered at 24Vdc and limited to a maximum current of 5A and a maximum power of 120W.
IP20 protection grade.
Suitable for installation on normally inflammable surfaces.

Before placing your order, please consult the product details also on the Flos professional website, in its technical data sheet and in the installation and assembly instructions to find all the information that may not be included in this catalogue or that could be relevant to your specific project or installation.

Standard Compliance and Quality Marks
EN60598-1 European Technical Standards and any subsequent additions.

FLOS
CONTROL BY CASAMBI

Available on the App Store

GET IT ON Google Play

HOW TO ORDER

1 CHOOSE YOUR PROFILE AND LENGTH

SURFACE PROFILE







L: 1 / 2 / 3 m

2 COMPLETE WITH MOUNTING ACCESSORIES

Feed connector



Right & Left

End cap



Intermediate Feed connector



Straight

Stopper



Intermediate connector



Feed 90° Corner



Feed Inner 90° Corner



Feed T piece



Feed Cross piece



3 SELECT POWER SUPPLY AND CONTROL OPTION

Recessed installation remote driver

(select the driver with the appropriate power according to the needs of your project)

Non Dimmable



60W / 100W / 120W

Casambi



60W / 100W / 120W

+



Casambi

Surface Installation Driver

Non Dimmable


Power Supply Surface End



96W

or

Power Supply Surface Middle



96W

4 SELECT A LIGHT MODULE AND CONTROL OPTION

Standard / Casambi Integrated (individual control)

Find Me 0





S/M

Atom 90





S/M

Find Me 1





S/M

Atom 120





S/M

Find Me 2





S/M/F

Atom 200





General Lighting

Find Me Suspension





S/M


ZERO TRACK SURFACE — PROFILES

Profili

Profilo elettromeccanico da interni per installazione a superficie (soffitto o parete). Da fissare con tappi a vite specifici forniti con il profilo. Disponibili lunghezze da 1m a 3m.
Il connettore di alimentazione, i connettori intermedi e i tappi vanno ordinati separatamente.
Disponibili connettori meccanici angolari complanari alimentabili a 90° e curvi (elemento simmetrico da sinistra e destra), connettori angolari di 90° con cambio di quota (parete-soffitto o parete-parete), e connettori a “T” e “X”.
Disponibili elementi di connessione alimentabili complanari a 90° e curvi
Per installazioni verticali è necessario installare lo stopper, da ordinare separatamente.

Profiles

Electro-mechanical indoor profile for surface installation (ceiling or wall). To be fixed with specific screw plugs that come with the profile. 1-meter to 3-meters lengths.
It is necessary to order the power connector, intermediate connectors and covers separately.
Feed unit connectors available as 90° flat corner and curve (symmetric element for left/right corner), ceiling/wall - wall/wall inner corner, as well as “T” and “X” shape.
For vertical installations, installing the stopper is mandatory. It must be ordered separately.

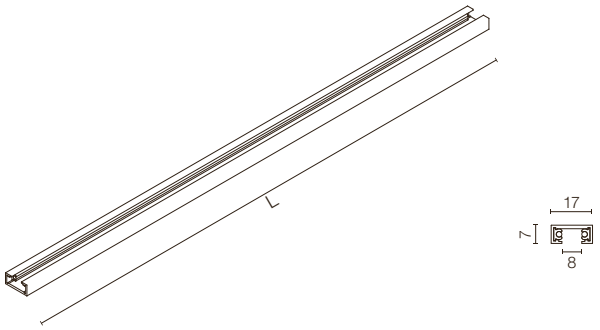


L: 1 m / 2 m / 3 m

L: 1000 mm
06.2500.40
06.2500.06
06.2500.14
06.2500.CZ
06.2500.18
L: 2000 mm
06.2501.40
06.2501.06
06.2501.14
06.2501.CZ
06.2501.18
L: 3000 mm
06.2502.40
06.2502.06
06.2502.14
06.2502.CZ
06.2502.18

Connettore di alimentazione per apparecchio remoto. Possibile entrata del cavo di alimentazione sia nella parte superiore che laterale.

Feed unit for remote power supply unit. Power cable inserting is possible both from the top and the side.






06.2540.40
06.2540.14
06.2540.CZ
06.2540.18

Connettore di alimentazione intermedio. Ingresso del cavo di alimentazione superiore.

Feed intermediate connector. Upper feeding cable entry.






06.2541.40
06.2541.14
06.2541.CZ
06.2541.18

Angolo esterno.

Intermediate connector.






06.2506.40
06.2506.14

Angolo piatto 90°. Presenta uno spazio posteriore che rende possibile la connessione di alimentazione.

90° flat corner. Can be powered. It has a rear space for the supply connection.






06.2542.40
06.2542.14
06.2542.CZ
06.2542.18

Angolo interno soffitto/parete - parete/parete. Presenta uno spazio posteriore su ogni lato che rende possibile la connessione di alimentazione.

Ceiling/wall - wall/wall inner corner. Can be powered. It has two spaces for the supply connection located on each side at the rear.






06.2543.40
06.2543.14
06.2543.CZ
06.2543.18

Curva interna soffitto/soffitto - parete/parete. Alimentabile dal retro.

Interior ceiling/ceiling-wall/ wall curve. Can be powered via connections on the back.






06.2544.40
06.2544.14
06.2544.CZ
06.2544.18

ZERO TRACK SURFACE — PROFILES

Connettore a forma di “T”. Alimentabile dal retro.

T-shaped connector. Can be powered via connections on the back.






06.2545.40
06.2545.14
06.2545.CZ
06.2545.18

Connettore a forma di “X”. Alimentabile dal retro.

Cross-shaped connector. Can be powered via connections on the back.





06.2546.40
06.2546.14
06.2546.CZ
06.2546.18

Terminale di chiusura.

End cap.





06.2509.40
06.2509.14
06.2509.CZ
06.2509.18

Stopper. Per fissaggio di apparecchi di illuminazione su guide verticali.

Stopper. For fixing luminaires in vertical track installations.






08.0630.40
08.0630.14

ZERO TRACK — LIGHT MODULES

Find Me 0 Designed By Jorge Herrera

Light Source: Power LED 3,5W - 300 lm - 2700K/CRI 90 / 3,5W - 325 lm - 3000K/CRI 90







Modulo di illuminazione LED d'accento, installabile sul sistema Zero Track.
Convertitore elettronico DC/DC incorporato.
Per il controllo individuale degli apparecchi selezionare le versioni con Casambi integrato.
Accessori inclusi (honeycomb e filtro a croce antiabbagliamento).

LED accent lighting module to be installed in the Zero Track system.
Incorporated DC/DC electronic converter.
To individually control the lights, select integrated Casambi versions.
Accessories included (honeycomb and screening crosspiece).


2700K

- 09.3801.40A
- 09.3801.06A
- 09.3801.14A
- 09.3801.CZA
- 09.3801.18A

**Casambi integrated

- 09.3901.40A
- 09.3901.06A
- 09.3901.14A
- 09.3901.CZA
- 09.3901.18A

15° SPOT



Luminous flux luminaire
169 lm

Beam Angle: 15°

h(m)	E(lx)	D(m)
1	1922	0.26
2	481	0.52
3	214	0.77
4	120	1.03
5	77	1.29


3000K

- 09.3800.40A
- 09.3800.06A
- 09.3800.14A
- 09.3800.CZA
- 09.3800.18A

**Casambi integrated

- 09.3900.40A
- 09.3900.06A
- 09.3900.14A
- 09.3900.CZA
- 09.3900.18A

15° SPOT



Luminous flux luminaire
183 lm

Beam Angle: 15°

h(m)	E(lx)	D(m)
1	2084	0.26
2	521	0.52
3	232	0.77
4	130	1.03
5	83	1.29


2700K

- 09.3803.40A
- 09.3803.06A
- 09.3803.14A
- 09.3803.CZA
- 09.3803.18A

**Casambi integrated

- 09.3903.40A
- 09.3903.06A
- 09.3903.14A
- 09.3903.CZA
- 09.3903.18A

25° MEDIUM



Luminous flux luminaire
179 lm

Beam Angle: 25°

h(m)	E(lx)	D(m)
1	929	0.45
2	232	0.89
3	103	1.34
4	58	1.79
5	37	2.23


3000K

- 09.3802.40A
- 09.3802.06A
- 09.3802.14A
- 09.3802.CZA
- 09.3802.18A

**Casambi integrated

- 09.3902.40A
- 09.3902.06A
- 09.3902.14A
- 09.3902.CZA
- 09.3902.18A

25° MEDIUM



Luminous flux luminaire
194 lm

Beam Angle: 25°

h(m)	E(lx)	D(m)
1	1007	0.45
2	252	0.89
3	112	1.34
4	63	1.79
5	40	2.23

** Il sistema di controllo con apparecchi in versione Casambi si regola direttamente via bluetooth tramite la applicazione FLOS Control® powered by CASAMBI.


** The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.


ZERO TRACK — LIGHT MODULES

Find Me 1 Designed By Jorge Herrera

Light Source: Power LED 5,5W - 450 lm - 2700K/CRI 90 / 5,5W - 485 lm - 3000K/CRI 90







Modulo di illuminazione LED d'accento, installabile sul sistema Zero Track.
Convertitore elettronico DC/DC incorporato.
Per il controllo individuale degli apparecchi selezionare le versioni con Casambi integrato.
Accessori inclusi (honeycomb e filtro a croce antiabbagliamento).

LED accent lighting module to be installed in the Zero Track system.
Incorporated DC/DC electronic converter.
To individually control the lights, select integrated Casambi versions.
Accessories included (honeycomb and screening crosspiece).


2700K

09.3812.40A
09.3812.06A
09.3812.14A
09.3812.CZA
09.3812.18A

**Casambi integrated

09.3912.40A
09.3912.06A
09.3912.14A
09.3912.CZA
09.3912.18A

14°
SPOT



Luminous flux luminaire
309 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	4168	0.24
2	1042	0.48
3	463	0.72
4	261	0.95
5	167	1.19


3000K

09.3810.40A
09.3810.06A
09.3810.14A
09.3810.CZA
09.3810.18A

**Casambi integrated

09.3910.40A
09.3910.06A
09.3910.14A
09.3910.CZA
09.3910.18A

14°
SPOT



Luminous flux luminaire
314 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	4193	0.24
2	1048	0.49
3	466	0.73
4	262	0.97
5	168	1.21


2700K

09.3813.40A
09.3813.06A
09.3813.14A
09.3813.CZA
09.3813.18A

**Casambi integrated

09.3913.40A
09.3913.06A
09.3913.14A
09.3913.CZA
09.3913.18A

20°
MEDIUM



Luminous flux luminaire
284 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	1893	0.35
2	473	0.70
3	210	1.06
4	118	1.41
5	76	1.76


3000K

09.3811.40A
09.3811.06A
09.3811.14A
09.3811.CZA
09.3811.18A

**Casambi integrated

09.3911.40A
09.3911.06A
09.3911.14A
09.3911.CZA
09.3911.18A

20°
MEDIUM



Luminous flux luminaire
289 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	1923	0.35
2	481	0.70
3	214	1.06
4	120	1.41
5	77	1.76

** Il sistema di controllo con apparecchi in versione Casambi si regola direttamente via bluetooth tramite la applicazione FLOS Control® powered by CASAMBI.


** The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.


ZERO TRACK — LIGHT MODULES

Find Me 2 Designed By Jorge Herrera

Light Source: Power LED 10,5W* - 650 lm - 2700K/CRI90 / 10,5W* - 700 lm - 3000K/CRI90







Modulo di illuminazione LED d'accento, installabile sul sistema Zero Track.
Convertitore elettronico DC/DC incorporato.
Per il controllo individuale degli apparecchi selezionare le versioni con Casambi integrato.
Accessori inclusi (honeycomb e filtro a croce antiabbagliamento).
Avvertenza: Solo installazione a soffitto.

LED accent lighting module to be installed in the Zero Track system.
Incorporated DC/DC electronic converter.
To individually control the lights, select integrated Casambi versions.
Accessories included (honeycomb and screening crosspiece).
Warning: Only ceiling installation.


2700K

- 09.3862.40A
- 09.3862.06A*
- 09.3862.14A
- 09.3862.CZA
- 09.3862.18A

**Casambi integrated

- 09.3962.40A
- 09.3962.06A*
- 09.3962.14A
- 09.3962.CZA
- 09.3962.18A

10° SPOT



Luminous flux luminaire 479 lm

Beam Angle: 10°

h(m)	E(lx)	D(m)
1	9244	0.18
2	2311	0.35
3	1027	0.53
4	578	0.70
5	370	0.88


3000K

- 09.3860.40A
- 09.3860.06A*
- 09.3860.14A
- 09.3860.CZA
- 09.3860.18A

**Casambi integrated

- 09.3960.40A
- 09.3960.06A*
- 09.3960.14A
- 09.3960.CZA
- 09.3960.18A

10° SPOT



Luminous flux luminaire 531 lm

Beam Angle: 10°

h(m)	E(lx)	D(m)
1	10249	0.18
2	2562	0.35
3	1139	0.53
4	641	0.70
5	410	0.88


2700K

- 09.3863.40A
- 09.3863.06A*
- 09.3863.14A
- 09.3863.CZA
- 09.3863.18A

**Casambi integrated

- 09.3963.40A
- 09.3963.06A*
- 09.3963.14A
- 09.3963.CZA
- 09.3963.18A

19° MEDIUM



Luminous flux luminaire 441 lm

Beam Angle: 19°

h(m)	E(lx)	D(m)
1	1991	0.34
2	498	0.67
3	221	1.01
4	124	1.34
5	80	1.68


3000K

- 09.3861.40A
- 09.3861.06A*
- 09.3861.14A
- 09.3861.CZA
- 09.3861.18A

**Casambi integrated

- 09.3961.40A
- 09.3961.06A*
- 09.3961.14A
- 09.3961.CZA
- 09.3961.18A

19° MEDIUM



Luminous flux luminaire 489 lm

Beam Angle: 19°

h(m)	E(lx)	D(m)
1	2208	0.34
2	552	0.67
3	245	1.01
4	138	1.34
5	88	1.68


2700K

- 09.3865.40A
- 09.3865.06A*
- 09.3865.14A
- 09.3865.CZA
- 09.3865.18A

**Casambi integrated

- 09.3965.40A
- 09.3965.06A*
- 09.3965.14A
- 09.3965.CZA
- 09.3965.18A

32° FLOOD



Luminous flux luminaire 364 lm

Beam Angle: 32°

h(m)	E(lx)	D(m)
1	722	0.57
2	180	1.15
3	80	1.72
4	45	2.29
5	29	2.87


3000K

- 09.3864.40A
- 09.3864.06A*
- 09.3864.14A
- 09.3864.CZA
- 09.3864.18A

**Casambi integrated

- 09.3964.40A
- 09.3964.06A*
- 09.3964.14A
- 09.3964.CZA
- 09.3964.18A

32° FLOOD



Luminous flux luminaire 404 lm

Beam Angle: 32°

h(m)	E(lx)	D(m)
1	800	0.57
2	200	1.15
3	89	1.72
4	50	2.29
5	32	2.87

* Per la finitura cromata la potenza è 8W. / For chrome finishes their power is 8W.

** Il sistema di controllo con apparecchi in versione Casambi si regola direttamente via bluetooth tramite la applicazione FLOS Control® powered by CASAMBI.


** The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.


ZERO TRACK — LIGHT MODULES

Find Me 1 Suspension Designed By Jorge Herrera

Light Source: Power LED 5,5W - 450 lm - 2700K/CRI 90 / 5,5W - 485 lm - 3000K/CRI 90







Modulo di illuminazione LED d'accento, installabile sul sistema Zero Track.
Convertitore elettronico DC/DC incorporato.
Per il controllo individuale degli apparecchi selezionare le versioni con Casambi integrato.
Non installabile su guide verticali.
Accessori inclusi (honeycomb e filtro a croce antiabbagliamento).

LED accent lighting module to be installed in the Zero Track system.
Incorporated DC/DC electronic converter.
To individually control the lights, select integrated Casambi versions.
Not suitable for vertical installations.
Accessories included (honeycomb and screening crosspiece).


2700K

- 09.3822.40A
- 09.3822.06A
- 09.3822.14A
- 09.3822.CZA
- 09.3822.18A

**Casambi integrated

- 09.3922.40A
- 09.3922.06A
- 09.3922.14A
- 09.3922.CZA
- 09.3922.18A

14° SPOT



Luminous flux luminaire 309 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	4168	0.24
2	1042	0.48
3	463	0.72
4	261	0.95
5	167	1.19


3000K

- 09.3820.40A
- 09.3820.06A
- 09.3820.14A
- 09.3820.CZA
- 09.3820.18A

**Casambi integrated

- 09.3920.40A
- 09.3920.06A
- 09.3920.14A
- 09.3920.CZA
- 09.3920.18A

14° SPOT



Luminous flux luminaire 314 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	4193	0.24
2	1048	0.49
3	466	0.73
4	262	0.97
5	168	1.21


2700K

- 09.3823.40A
- 09.3823.06A
- 09.3823.14A
- 09.3823.CZA
- 09.3823.18A

**Casambi integrated

- 09.3923.40A
- 09.3923.06A
- 09.3923.14A
- 09.3923.CZA
- 09.3923.18A

20° MEDIUM



Luminous flux luminaire 186 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	1238	0.35
2	310	0.70
3	138	1.06
4	77	1.41
5	50	1.76


3000K

- 09.3821.40A
- 09.3821.06A
- 09.3821.14A
- 09.3821.CZA
- 09.3821.18A

**Casambi integrated

- 09.3921.40A
- 09.3921.06A
- 09.3921.14A
- 09.3921.CZA
- 09.3921.18A

20° MEDIUM



Luminous flux luminaire 193 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	1285	0.35
2	321	0.70
3	143	1.06
4	80	1.41
5	51	1.76

** Il sistema di controllo con apparecchi in versione Casambi si regola direttamente via bluetooth tramite la applicazione FLOS Control® powered by CASAMBI.


** The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

ZERO TRACK — LIGHT MODULES

Atom 90 Designed By Piero Lissoni

Light Source: Power LED 5,5W* - 450 lm - 2700K/CRI 90 / 5,5W* - 485 lm - 3000K/CRI 90








Modulo di illuminazione LED d'accento, installabile sul sistema Zero Track.
Convertitore elettronico DC/DC incorporato.
Per il controllo individuale degli apparecchi selezionare le versioni con Casambi integrato.
Accessori inclusi (honeycomb e filtro a croce antiabbagliamento).

LED accent lighting module to be installed in the Zero Track system.
Incorporated DC/DC electronic converter.
To individually control the lights, select integrated Casambi versions.
Accessories included (honeycomb and screening crosspiece).

2700K
- 09.3831.40A
- 09.3831.06A*
- 09.3831.14A
- 09.3831.CZA
- 09.3831.18A

**Casambi integrated
- 09.3931.40A
- 09.3931.06A*
- 09.3931.14A
- 09.3931.CZA
- 09.3931.18A

14° SPOT



Luminous flux luminaire 224 lm


Beam Angle: 14°

h(m)	E(lx)	D(m)
1	2558	0.25
2	640	0.51
3	284	0.76
4	160	1.02
5	102	1.27

3000K
- 09.3830.40A
- 09.3830.06A*
- 09.3830.14A
- 09.3830.CZA
- 09.3830.18A

**Casambi integrated
- 09.3930.40A
- 09.3930.06A*
- 09.3930.14A
- 09.3930.CZA
- 09.3930.18A

14° SPOT



Luminous flux luminaire 247 lm


Beam Angle: 14°

h(m)	E(lx)	D(m)
1	2832	0.25
2	708	0.51
3	315	0.76
4	177	1.02
5	113	1.27

2700K
- 09.3833.40A
- 09.3833.06A*
- 09.3833.14A
- 09.3833.CZA
- 09.3833.18A

**Casambi integrated
- 09.3933.40A
- 09.3933.06A*
- 09.3933.14A
- 09.3933.CZA
- 09.3933.18A

25° MEDIUM



Luminous flux luminaire 261 lm


Beam Angle: 25°

h(m)	E(lx)	D(m)
1	1355	0.45
2	339	0.89
3	151	1.34
4	85	1.79
5	54	2.23

3000K
- 09.3832.40A
- 09.3832.06A*
- 09.3832.14A
- 09.3832.CZA
- 09.3832.18A

**Casambi integrated
- 09.3932.40A
- 09.3932.06A*
- 09.3932.14A
- 09.3932.CZA
- 09.3932.18A

25° MEDIUM



Luminous flux luminaire 289 lm

Beam Angle: 25°

h(m)	E(lx)	D(m)
1	1500	0.45
2	375	0.89
3	167	1.34
4	94	1.79
5	60	2.23

* Per la finitura cromata la potenza è 4,7W. / For chrome finishes their power is 4.7W.


** Il sistema di controllo con apparecchi in versione Casambi si regola direttamente via bluetooth tramite la applicazione FLOS Control® powered by CASAMBI.


** The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Atom 120 Designed By Piero Lissoni

Light Source: Power LED 8W* - 635 lm - 2700K/CRI 90 / 8W* - 680 lm - 3000K/CRI 90








Modulo di illuminazione LED d'accento, installabile sul sistema Zero Track.
Convertitore elettronico DC/DC incorporato.
Per il controllo individuale degli apparecchi selezionare le versioni con Casambi integrato.
Accessori inclusi (honeycomb e filtro a croce antiabbagliamento).

LED accent lighting module to be installed in the Zero Track system.
Incorporated DC/DC electronic converter.
To individually control the lights, select integrated Casambi versions.
Accessories included (honeycomb and screening crosspiece).

2700K
- 09.3841.40A
- 09.3841.06A*
- 09.3841.14A
- 09.3841.CZA
- 09.3841.18A

**Casambi integrated
- 09.3941.40A
- 09.3941.06A*
- 09.3941.14A
- 09.3941.CZA
- 09.3941.18A

14° SPOT




Luminous flux luminaire 433 lm

Beam Angle:		14°
h(m)	E(lx)	D(m)
1	5843	0.24
2	1461	0.48
3	649	0.72
4	365	0.95
5	234	1.19

3000K
- 09.3840.40A
- 09.3840.06A*
- 09.3840.14A
- 09.3840.CZA
- 09.3840.18A

**Casambi integrated
- 09.3940.40A
- 09.3940.06A*
- 09.3940.14A
- 09.3940.CZA
- 09.3940.18A

14° SPOT




Luminous flux luminaire 440 lm

Beam Angle:		14°
h(m)	E(lx)	D(m)
1	5878	0.24
2	1469	0.49
3	653	0.73
4	367	0.97
5	235	1.21

2700K
- 09.3843.40A
- 09.3843.06A*
- 09.3843.14A
- 09.3843.CZA
- 09.3843.18A

**Casambi integrated
- 09.3943.40A
- 09.3943.06A*
- 09.3943.14A
- 09.3943.CZA
- 09.3943.18A

20° MEDIUM




Luminous flux luminaire 364 lm

Beam Angle:		20°
h(m)	E(lx)	D(m)
1	2557	0.35
2	639	0.70
3	284	1.06
4	160	1.41
5	102	1.76

3000K
- 09.3842.40A
- 09.3842.06A*
- 09.3842.14A
- 09.3842.CZA
- 09.3842.18A

**Casambi integrated
- 09.3942.40A
- 09.3942.06A*
- 09.3942.14A
- 09.3942.CZA
- 09.3942.18A

20° MEDIUM




Luminous flux luminaire 373 lm


Beam Angle:		20°
h(m)	E(lx)	D(m)
1	2624	0.35
2	656	0.70
3	292	1.06
4	164	1.41
5	105	1.76

Atom 200 Designed By Piero Lissoni

Light Source: Power LED 10,5W - 1050 lm - 2700K/CRI 90 / 10,5W - 1150 lm - 3000K/CRI 90








Modulo di illuminazione LED generale, installabile sul sistema Zero Track.
Convertitore elettronico DC/DC incorporato.
Per il controllo individuale degli apparecchi selezionare le versioni con Casambi integrato.
Non installabile su guide verticali.
Avvertenza: Solo installazione a soffitto.

LED general lighting module to be installed in the Zero Track system.
Incorporated DC/DC electronic converter.
To individually control the lights, select integrated Casambi versions.
Not suitable for vertical installations.
Warning: Only ceiling installation.

2700K
- 09.3851.40
- 09.3851.06
- 09.3851.14
- 09.3851.CZ
- 09.3851.18

**Casambi integrated
- 09.3951.40
- 09.3951.06
- 09.3951.14
- 09.3951.CZ
- 09.3951.18

110°




Luminous flux luminaire 395 lm

Beam Angle:		110°
h(m)	E(lx)	D(m)
1	145	2.86
2	36	5.73
3	16	8.59
4	9	11.45
5	6	14.32

3000K
- 09.3850.40
- 09.3850.06
- 09.3850.14
- 09.3850.CZ
- 09.3850.18

**Casambi integrated
- 09.3950.40
- 09.3950.06
- 09.3950.14
- 09.3950.CZ
- 09.3950.18

110°



Luminous flux luminaire 424 lm

Beam Angle:		110°
h(m)	E(lx)	D(m)
1	156	2.86
2	39	5.73
3	17	8.59
4	10	11.45
5	6	14.32

* Per la finitura cromata la potenza è 6W. / For chrome finishes their power is 6W.

** Il sistema di controllo con apparecchi in versione Casambi si regola direttamente via bluetooth tramite la applicazione FLOS Control® powered by CASAMBI.

** The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.


Driver / Drivers

Remote Installation

Fonte di alimentazione remota.
Non regolabile. 220/240V.

Remote power supply.
Non Dimmable. 220/240V.





120W - 220/240V
L1: 300 - L2: 40 - L3: 30
60.9516

120W - 220/240V
L1: 268 - L2: 45 - L3: 31
60.9777A

100W - 220/240V
L1: 295 - L2: 43 - L3: 30
60.9443

60W - 220/240V
L1: 180 - L2: 52 - L3: 30
60.9515


60W - 220/240V
L1: 225 - L2: 43 - L3: 30
60.9374

Surface Installation Driver

Fonte di alimentazione finale per installazione a superficie. Non regolabile.

Power supply surface end. Non Dimmable.






96W
06.2510.40A
06.2510.06A
06.2510.14A
06.2510.CZA
06.2510.18A

Fonte di alimentazione intermedia per installazione a superficie. Non regolabile.

Power supply surface middle. Non Dimmable.






96W
06.2511.40A
06.2511.06A
06.2511.14A
06.2511.CZA
06.2511.18A

Unità di controllo / Control Units


Gateway di regolazione wireless. Da 1-10V a Casambi. Per installazione remota. Vedi le specifiche del prodotto nel manuale Flos Control. Consigliato per fungere da gateway da Lutron a Casambi.

Wireless Dimmer Bridge. From 1-10V to Casambi. For remote installation. See product specifications in the Flos Control manual. Recommended to act as a gateway from Lutron to Casambi.



DIM 1-10V >> Casambi
08.0824.14

Track Lenght (m)	% Driver Nominal Power
1	95
2	95
3	95
4	95
5	95
6	93
7	91
8	89
9	87
10	85

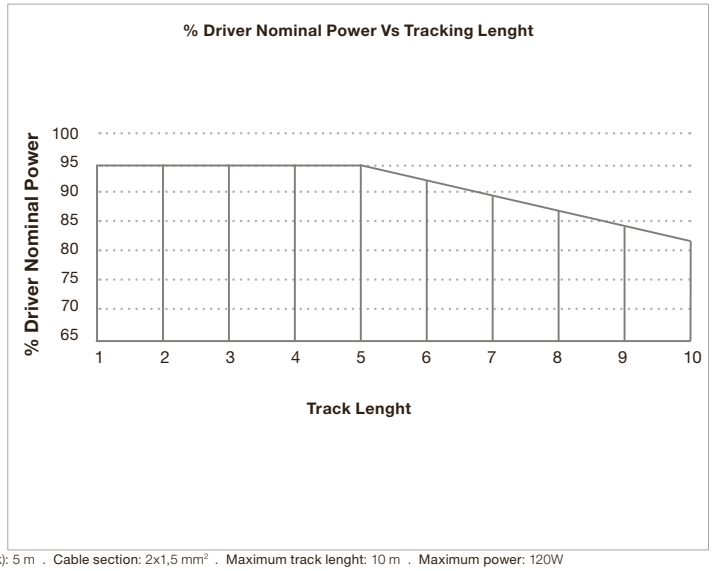


Example:
Ref. 60.9361: 57W / 4 m track
57W x 0,95 = 54,15W available


	W luminary	N° luminaries	W luminaries
Find Me 0	3,5	3	10,5
Find Me 1	5,5	0	0
Find Me 2	10,5	0	0
Atom 90	5,5	3	16,5
Atom 120	8	2	16
Atom 200	10,5	1	10,5
	Total system power: 53,5W		


Maximum cable lenght: (driver to track): 5 m . **Cable section:** 2x1,5 mm² . **Maximum track lenght:** 10 m . **Maximum power:** 120W

ZERO TRACK - INSTALLATION


Remote Driver Installations

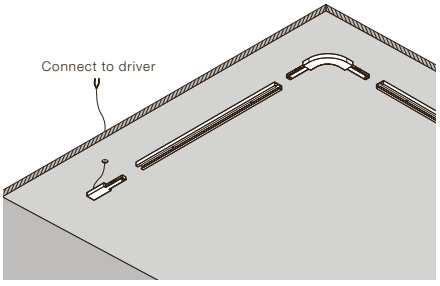

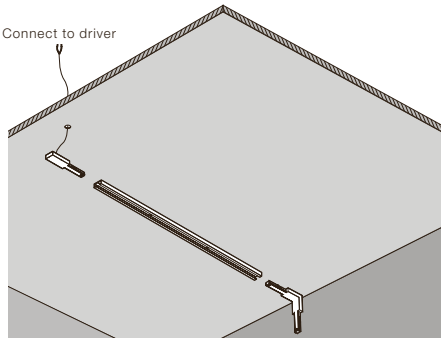

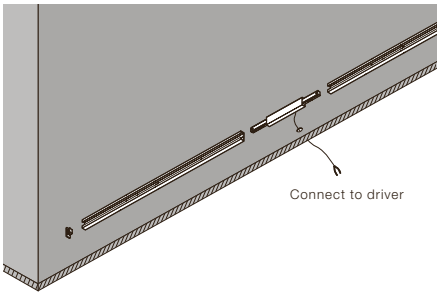

Individual Casambi / No DIM



FLOS
CONTROL BY CASAMBI